



# CONSANI HYDRAULIC BRICK HANDLING GRAB

## Features:

Lever system leaving it free standing when detached from the crane or fork lift truck.  
 Pivots have long lasting, replaceable bushes and are equipped with grease nipples.  
 Six month guarantee on material; workmanship. All parts are replaceable with a complete range of spares available.

**Special & other sizes made to order.**

**Accessories available off the shelf:**  
 Fork lift adapter; continuous rotator;  
 Polyurethane grips; various head, leg, cylinder types and sizes.

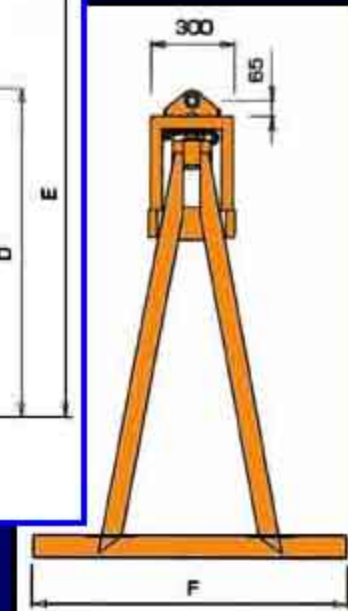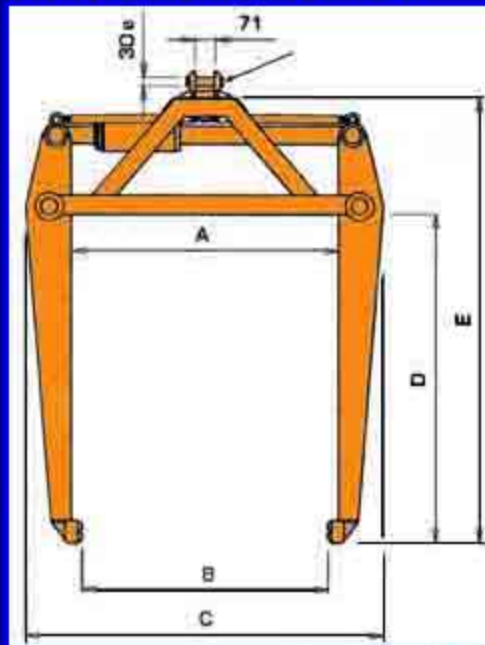

## SPECIFICATIONS

	Model	AB600	AB601	AB602	B200	C100	C600	
A - Dimensions at top of legs	mm	1050	1050	1050	1326	960	1050	
Ideal width of stack- Dim B	mm	970	970	970	940	880	970	
B	Max	mm	1250	1250	1250	1160	1025	1115
B	Min	mm	810	810	810	710	500	590
C	mm	1370	1370	1370	1326	1280	1370	
D	mm	1175	1175	1175	1359	1175	1175	
E	mm	1590	1590	1590	1580	1640	1640	
F	mm	1130	1130	1130	1130	1130	1130	

Recommended stack size:	Width	mm	970	970	970	940	880	970
	Length	mm	1100	1100	1100	1100	1100	1100
	Height	mm	1150	1150	1150	1330	1150	1150
Cylinder ports	N.P.T	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	
Lifting capacity	Kg	1900	1900	1900	1900	1900	1900	
Working pressure	MPa	18-22	14-18	11.5-14	18-22	18-22	18-22	